

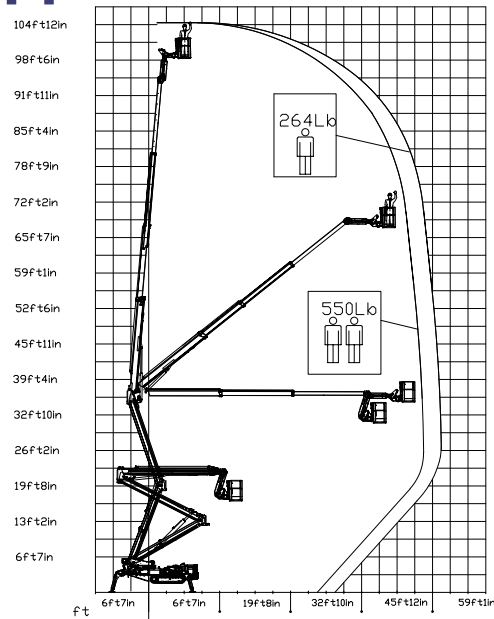
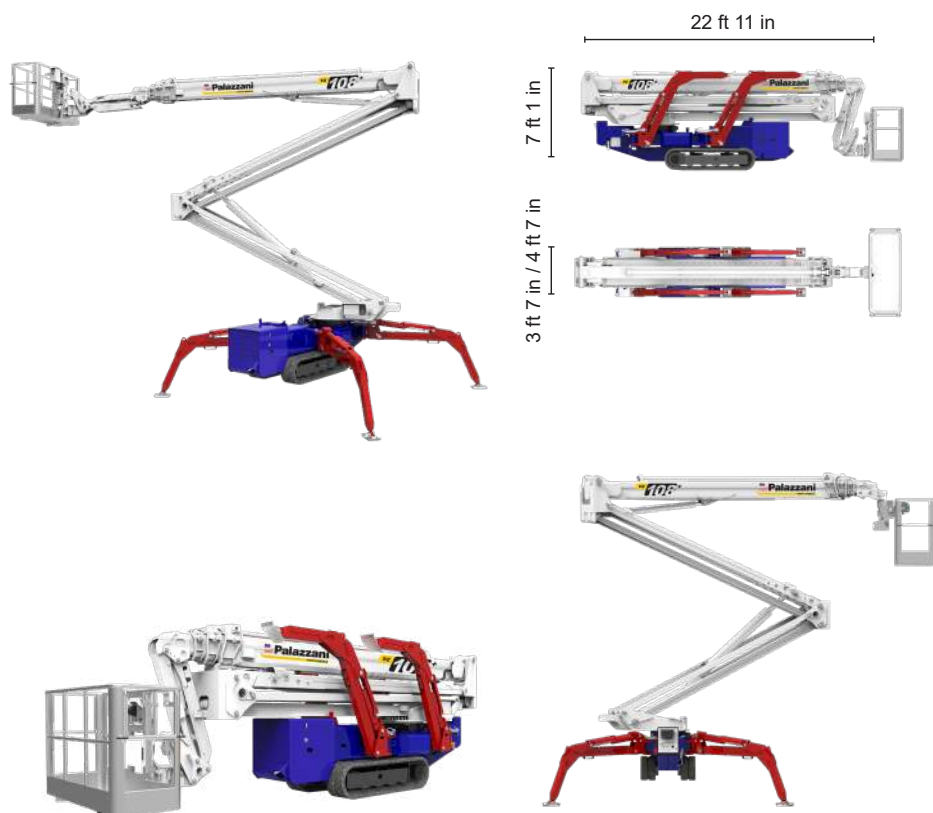





STANDARD EQUIP.

-  **NON-MARKING TRACKS**
-  **ADDITIONAL AIR/WATER PIPES**
-  **TREE CUTTERS COVER KIT**
-  **RADIO CONTROL**
-  **PEDAL ON THE CAGE**
-  **INTER-PHONIC COMMUNICATION SYSTEM**
-  **PLASTIC PADS FOR OUTRIGGERS WITH STOP**
-  **PALCONTROL**



50 ft 6 in	53 ft 10 in	31 ft 2 in	L1	L2	W1	W2	W3
550 lb	264 lb	264/550 lb	15 ft 6 in	20 ft 3 in	16 ft 1 in	13 ft 2 in	10 ft 3 in



TZ 108+/C



105 ft

53 ft 10 in

550 lb

360°

5 ft 11 in x 2 ft 4 in

90°+90°

10 ft 3 in x 16 ft 1 in

18%

32%

1,49 mph

15873 lb

11016 lb

64,8 psf

119,29 psf



BI-ENERGY

 Diesel Kubota
18,2 kW

 Single-phase electric motor
110 VAC - 1,1 kW




Palazzani North America Corp.
175 SW 7th St., Suite #1705, Miami, FL33130 US
Tel: +1 877-PALAZZANI
Mail: sales@palazzani-usa.com
www.palazzani-usa.com



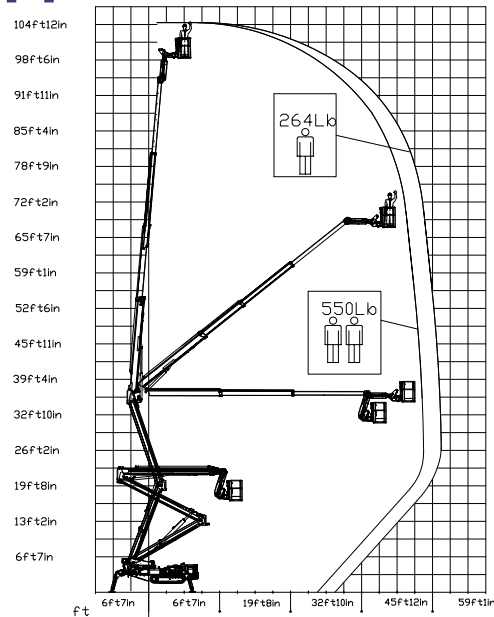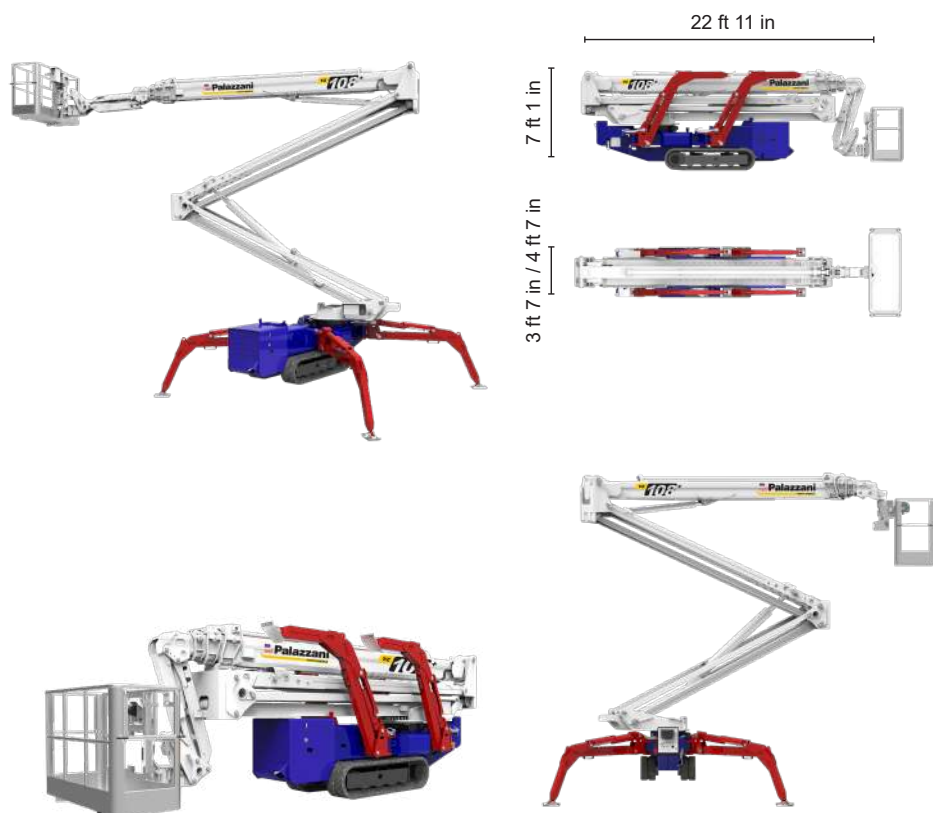

STANDARD EQUIP.

-  NON-MARKING TRACKS
-  ADDITIONAL AIR/WATER PIPES
-  TREE CUTTERS COVER KIT
-  RADIO CONTROL
-  PEDAL ON THE CAGE
-  INTER-PHONIC COMMUNICATION SYSTEM
-  PLASTIC PADS FOR OUTRIGGERS WITH STOP
-  PALCONTROL



50 ft 6 in	53 ft 10 in	31 ft 2 in	L1	L2	W1	W2	W3
550 lb	264 lb	264/550 lb	15 ft 6 in	20 ft 3 in	16 ft 1 in	13 ft 2 in	10 ft 3 in



TZ 108+/C



105 ft

53 ft 10 in

550 lb

360°

5 ft 11 in x 2 ft 4 in

90°+90°

10 ft 3 in x 16 ft 1 in

18%

32%

1,49 mph

15873 lb

11016 lb

64,8 psf

119,29 psf

ECO



Inverter actuated electric motor
16 kW



Lithium iron phoshate battery LiFePO4
48 V - 420 Ah



Palazzani North America Corp.
175 SW 7th St., Suite #1705, Miami, FL33130 US
Tel: +1 877-PALAZZANI
Mail: sales@palazzani-usa.com
www.palazzani-usa.com



The technical data may deviate +/- 3% from the specified values.
Characteristics and technical data are informative only and subjected to change without notice.




NC 1004 A 24

TZ 108⁺ SPIDER LIFT

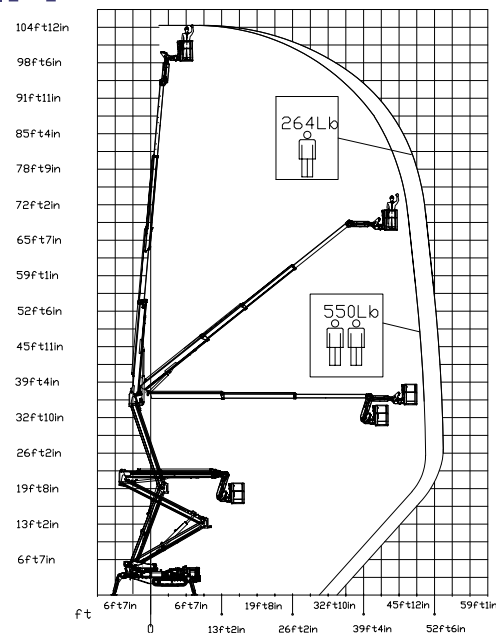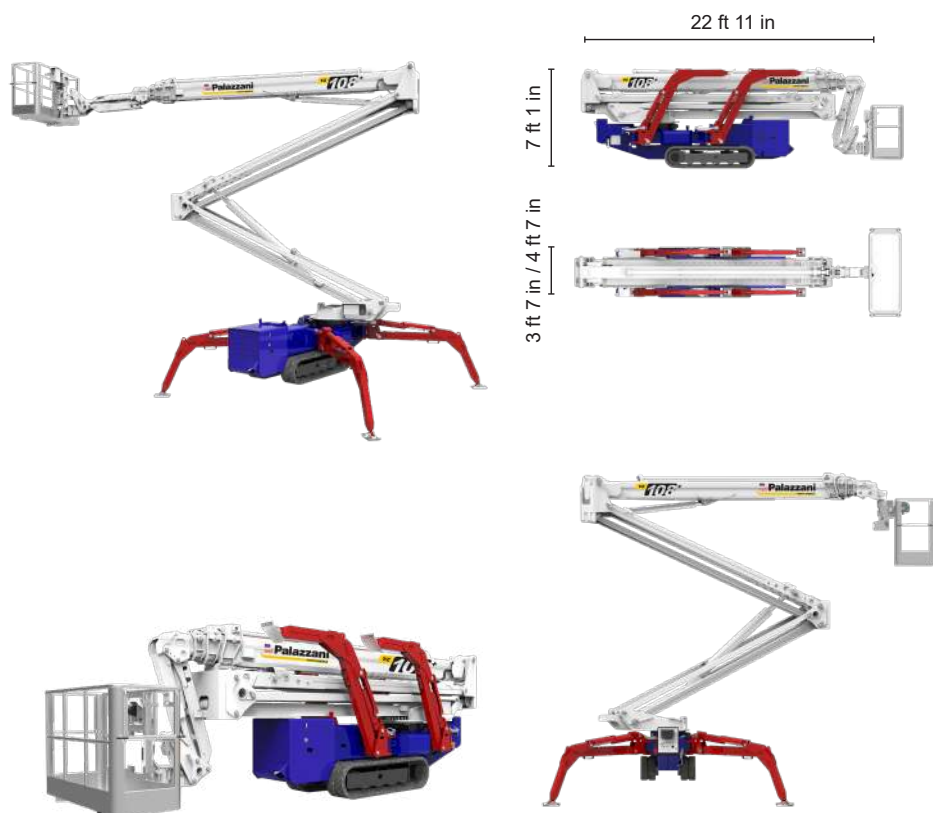


STANDARD EQUIP.

-  NON-MARKING TRACKS
-  ADDITIONAL AIR/WATER PIPES
-  TREE CUTTERS COVER KIT
-  RADIO CONTROL
-  PEDAL ON THE CAGE
-  INTER-PHONIC COMMUNICATION SYSTEM
-  PLASTIC PADS FOR OUTRIGGERS WITH STOP
-  PALCONTROL



50 ft 6 in	53 ft 10 in	31 ft 2 in	L1	L2	W1	W2	W3
550 lb	264 lb	264/550 lb	15 ft 6 in	20 ft 3 in	16 ft 1 in	13 ft 2 in	10 ft 3 in



TZ 108+/C 105 ft 53 ft 10 in 550 lb 360° 5 ft 11 in x 2 ft 4 in 90°+90° 10 ft 3 in x 16 ft 1 in 18% 32% 1,12 mph 16446 lb 11016 lb 67,14 psf 123,6 psf

HYBRID²

-  Diesel Kubota
10,6 kW
-  Inverter actuated electric motor
16 kW
-  Lithium iron phoshate battery LiFePO4
48 V - 315 Ah

The technical data may deviate +/- 3% from the specified values.
Characteristics and technical data are informative only and subjected to change without notice.

Palazzani North America Corp.
175 SW 7th St., Suite #1705, Miami, FL33130 US
Tel: +1 877-PALAZZANI
Mail: sales@palazzani-usa.com
www.palazzani-usa.com

